


レジャーサ FSGP寸法・重量表

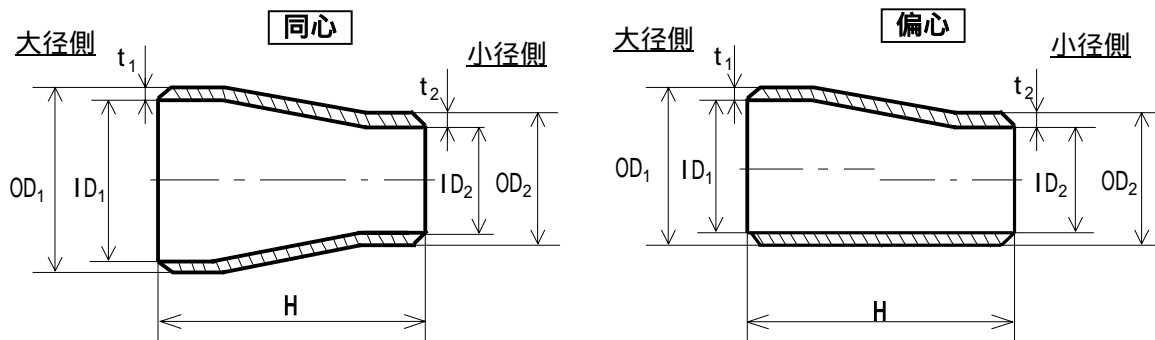


単位：mm

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20×15	3/4×1/2	27.2	21.6	2.8	21.7	16.1	2.8	38.1	0.057
25×20	1×3/4	34.0	27.6	3.2	27.2	21.6	2.8	50.8	0.110
15	1/2	34.0	27.6	3.2	21.7	16.1	2.8	50.8	0.100
32×25	1-1/4×1	42.7	35.7	3.5	34.0	27.6	3.2	50.8	0.153
20	3/4	42.7	35.7	3.5	27.2	21.6	2.8	50.8	0.139
15	1/2	42.7	35.7	3.5	21.7	16.1	2.8	50.8	0.128
40×32	1-1/2×1-1/4	48.6	41.6	3.5	42.7	35.7	3.5	63.5	0.231
25	1	48.6	41.6	3.5	34.0	27.6	3.2	63.5	0.208
20	3/4	48.6	41.6	3.5	27.2	21.6	2.8	63.5	0.191
15	1/2	48.6	41.6	3.5	21.7	16.1	2.8	63.5	0.177
50×40	2×1-1/2	60.5	52.9	3.8	48.6	41.6	3.5	76.2	0.363
32	1-1/4	60.5	52.9	3.8	42.7	35.7	3.5	76.2	0.343
25	1	60.5	52.9	3.8	34.0	27.6	3.2	76.2	0.315
20	3/4	60.5	52.9	3.8	27.2	21.6	2.8	76.2	0.293
65×50	2-1/2×2	76.3	67.9	4.2	60.5	52.9	3.8	88.9	0.593
40	1-1/2	76.3	67.9	4.2	48.6	41.6	3.5	88.9	0.542
32	1-1/4	76.3	67.9	4.2	42.7	35.7	3.5	88.9	0.518
25	1	76.3	67.9	4.2	34.0	27.6	3.2	88.9	0.482
80×65	3×2-1/2	89.1	80.7	4.2	76.3	67.9	4.2	88.9	0.724
50	2	89.1	80.7	4.2	60.5	52.9	3.8	88.9	0.658
40	1-1/2	89.1	80.7	4.2	48.6	41.6	3.5	88.9	0.610
32	1-1/4	89.1	80.7	4.2	42.7	35.7	3.5	88.9	0.587
25	1	89.1	80.7	4.2	34.0	27.6	3.2	88.9	0.553
90×80	3-1/2×3	101.6	93.2	4.2	89.1	80.7	4.2	101.6	0.960
65	2-1/2	101.6	93.2	4.2	76.3	67.9	4.2	101.6	0.898
50	2	101.6	93.2	4.2	60.5	52.9	3.8	101.6	0.825
40	1-1/2	101.6	93.2	4.2	48.6	41.6	3.5	101.6	0.771
100×90	4×3-1/2	114.3	105.3	4.5	101.6	93.2	4.2	101.6	1.17
80	3	114.3	105.3	4.5	89.1	80.7	4.2	101.6	1.10
65	2-1/2	114.3	105.3	4.5	76.3	67.9	4.2	101.6	1.04
50	2	114.3	105.3	4.5	60.5	52.9	3.8	101.6	0.966
40	1-1/2	114.3	105.3	4.5	48.6	41.6	3.5	101.6	0.911
125×100	5×4	139.8	130.8	4.5	114.3	105.3	4.5	127.0	1.73
90	3-1/2	139.8	130.8	4.5	101.6	93.2	4.2	127.0	1.66
80	3	139.8	130.8	4.5	89.1	80.7	4.2	127.0	1.58
65	2-1/2	139.8	130.8	4.5	76.3	67.9	4.2	127.0	1.50
50	2	139.8	130.8	4.5	60.5	52.9	3.8	127.0	1.41

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
150×125	6 × 5	165.2	155.2	5.0	139.8	130.8	4.5	139.7	2.55
100	4	165.2	155.2	5.0	114.3	105.3	4.5	139.7	2.36
90	3-1/2	165.2	155.2	5.0	101.6	93.2	4.2	139.7	2.27
80	3	165.2	155.2	5.0	89.1	80.7	4.2	139.7	2.18
65	2-1/2	165.2	155.2	5.0	76.3	67.9	4.2	139.7	2.09
50	2	165.2	155.2	5.0	60.5	52.9	3.8	139.7	1.98
175×150	7 × 6	190.7	180.1	5.3	165.2	155.2	5.0	152.4	3.45
125	5	190.7	180.1	5.3	139.8	130.8	4.5	152.4	3.23
100	4	190.7	180.1	5.3	114.3	105.3	4.5	152.4	3.02
200×175	8 × 7	216.3	204.7	5.8	190.7	180.1	5.3	152.4	4.32
150	6	216.3	204.7	5.8	165.2	155.2	5.0	152.4	4.08
125	5	216.3	204.7	5.8	139.8	130.8	4.5	152.4	3.87
100	4	216.3	204.7	5.8	114.3	105.3	4.5	152.4	3.66
250×200	10 × 8	267.4	254.2	6.6	216.3	204.7	5.8	177.8	6.87
150	6	267.4	254.2	6.6	165.2	155.2	5.0	177.8	6.31
125	5	267.4	254.2	6.6	139.8	130.8	4.5	177.8	6.05
100	4	267.4	254.2	6.6	114.3	105.3	4.5	177.8	5.80
300×250	12 × 10	318.5	304.7	6.9	267.4	254.2	6.6	203.2	9.96
200	8	318.5	304.7	6.9	216.3	204.7	5.8	203.2	9.28
150	6	318.5	304.7	6.9	165.2	155.2	5.0	203.2	8.68
350×300	14 × 12	355.6	339.8	7.9	318.5	304.7	6.9	330.2	21.2
250	10	355.6	339.8	7.9	267.4	254.2	6.6	330.2	19.7
200	8	355.6	339.8	7.9	216.3	204.7	5.8	330.2	18.3
400×350	16 × 14	406.4	390.6	7.9	355.6	339.8	7.9	355.6	25.9
300	12	406.4	390.6	7.9	318.5	304.7	6.9	355.6	24.7
250	10	406.4	390.6	7.9	267.4	254.2	6.6	355.6	23.2
200	8	406.4	390.6	7.9	216.3	204.7	5.8	355.6	21.7
450×400	18 × 16	457.2	441.4	7.9	406.4	390.6	7.9	381.0	31.5
350	14	457.2	441.4	7.9	355.6	339.8	7.9	381.0	29.8
300	12	457.2	441.4	7.9	318.5	304.7	6.9	381.0	28.6
250	10	457.2	441.4	7.9	267.4	254.2	6.6	381.0	27.1
500×450	20 × 18	508.0	492.2	7.9	457.2	441.4	7.9	508.0	47.0
400	16	508.0	492.2	7.9	406.4	390.6	7.9	508.0	44.7
350	14	508.0	492.2	7.9	355.6	339.8	7.9	508.0	42.4
300	12	508.0	492.2	7.9	318.5	304.7	6.9	508.0	40.8

- 1 . 印は日本工業規格(J I S)に含まれておりません。
- 2 . 印の偏心レジュースは製作しておりません。

レギューサ Sch 5 S 寸法・重量表

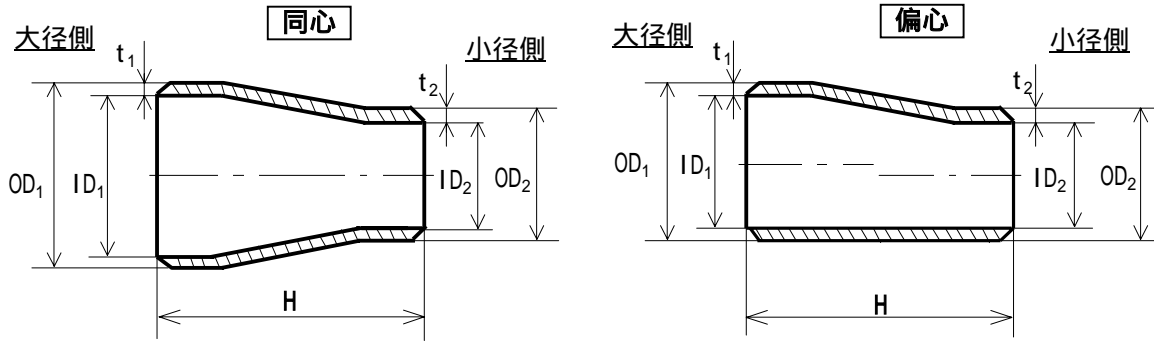


単位：mm

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20 × 15	3/4 × 1/2	27.2	23.9	1.65	21.7	18.4	1.65	38.1	0.035
25 × 20	1 × 3/4	34.0	30.7	1.65	27.2	23.9	1.65	50.8	0.060
15	1/2	34.0	30.7	1.65	21.7	18.4	1.65	50.8	0.055
32 × 25	1-1/4 × 1	42.7	39.4	1.65	34.0	30.7	1.65	50.8	0.076
20	3/4	42.7	39.4	1.65	27.2	23.9	1.65	50.8	0.070
40 × 32	1-1/2 × 1-1/4	48.6	45.3	1.65	42.7	39.4	1.65	63.5	0.114
25	1	48.6	45.3	1.65	34.0	30.7	1.65	63.5	0.103
20	3/4	48.6	45.3	1.65	27.2	23.9	1.65	63.5	0.095
50 × 40	2 × 1-1/2	60.5	57.2	1.65	48.6	45.3	1.65	76.2	0.164
32	1-1/4	60.5	57.2	1.65	42.7	39.4	1.65	76.2	0.156
25	1	60.5	57.2	1.65	34.0	30.7	1.65	76.2	0.143
65 × 50	2-1/2 × 2	76.3	72.1	2.1	60.5	57.2	1.65	88.9	0.306
40	1-1/2	76.3	72.1	2.1	48.6	45.3	1.65	88.9	0.281
32	1-1/4	76.3	72.1	2.1	42.7	39.4	1.65	88.9	0.269
80 × 65	3 × 2-1/2	89.1	84.9	2.1	76.3	72.1	2.1	88.9	0.372
50	2	89.1	84.9	2.1	60.5	57.2	1.65	88.9	0.339
40	1-1/2	89.1	84.9	2.1	48.6	45.3	1.65	88.9	0.315
90 × 80	3-1/2 × 3	101.6	97.4	2.1	89.1	84.9	2.1	101.6	0.491
65	2-1/2	101.6	97.4	2.1	76.3	72.1	2.1	101.6	0.460
50	2	101.6	97.4	2.1	60.5	57.2	1.65	101.6	0.424
100 × 90	4 × 3-1/2	114.3	110.1	2.1	101.6	97.4	2.1	101.6	0.558
80	3	114.3	110.1	2.1	89.1	84.9	2.1	101.6	0.528
65	2-1/2	114.3	110.1	2.1	76.3	72.1	2.1	101.6	0.499
50	2	114.3	110.1	2.1	60.5	57.2	1.65	101.6	0.464
125 × 100	5 × 4	139.8	134.2	2.8	114.3	110.1	2.1	127.0	1.09
90	3-1/2	139.8	134.2	2.8	101.6	97.4	2.1	127.0	1.04
80	3	139.8	134.2	2.8	89.1	84.9	2.1	127.0	0.998
65	2-1/2	139.8	134.2	2.8	76.3	72.1	2.1	127.0	0.951
150 × 125	6 × 5	165.2	159.6	2.8	139.8	134.2	2.8	139.7	1.45
100	4	165.2	159.6	2.8	114.3	110.1	2.1	139.7	1.34
90	3-1/2	165.2	159.6	2.8	101.6	97.4	2.1	139.7	1.29
80	3	165.2	159.6	2.8	89.1	84.9	2.1	139.7	1.24
200 × 150	8 × 6	216.3	210.7	2.8	165.2	159.6	2.8	152.4	2.00
125	5	216.3	210.7	2.8	139.8	134.2	2.8	152.4	1.90
100	4	216.3	210.7	2.8	114.3	110.1	2.1	152.4	1.80
250 × 200	10 × 8	267.4	260.6	3.4	216.3	210.7	2.8	177.8	3.59
150	6	267.4	260.6	3.4	165.2	159.6	2.8	177.8	3.30
125	5	267.4	260.6	3.4	139.8	134.2	2.8	177.8	3.17
300 × 250	12 × 10	318.5	310.5	4.0	267.4	260.6	3.4	203.2	5.83
200	8	318.5	310.5	4.0	216.3	210.7	2.8	203.2	5.44
150	6	318.5	310.5	4.0	165.2	159.6	2.8	203.2	5.09

厚さ 5 S, 10 S, 20 S はステンレス鋼製管継手にのみ適用します。

レジャーサ Sch 10 S寸法・重量表

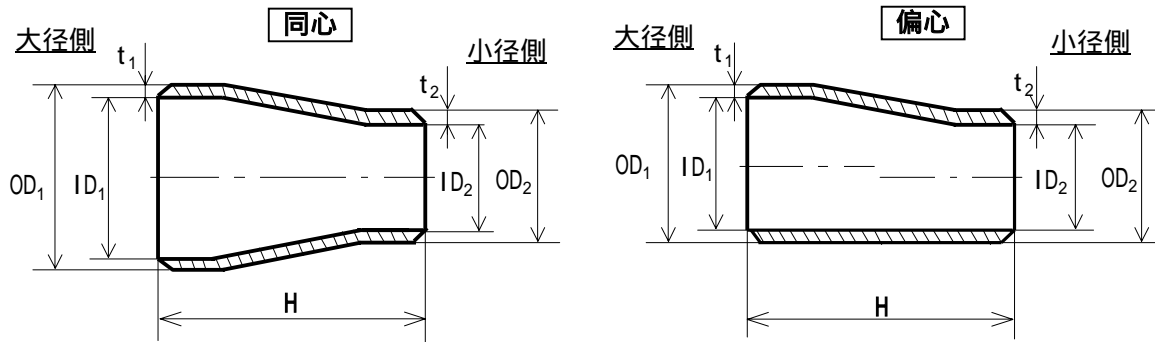


単位：mm

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20 × 15	3/4 × 1/2	27.2	23.0	2.1	21.7	17.5	2.1	38.1	0.044
25 × 20	1 × 3/4	34.0	28.4	2.8	27.2	23.0	2.1	50.8	0.098
15	1/2	34.0	28.4	2.8	21.7	17.5	2.1	50.8	0.088
32 × 25	1-1/4 × 1	42.7	37.1	2.8	34.0	28.4	2.8	50.8	0.125
20	3/4	42.7	37.1	2.8	27.2	23.0	2.1	50.8	0.113
40 × 32	1-1/2 × 1-1/4	48.6	43.0	2.8	42.7	37.1	2.8	63.5	0.188
25	1	48.6	43.0	2.8	34.0	28.4	2.8	63.5	0.170
20	3/4	48.6	43.0	2.8	27.2	23.0	2.1	63.5	0.156
50 × 40	2 × 1-1/2	60.5	54.9	2.8	48.6	43.0	2.8	76.2	0.273
32	1-1/4	60.5	54.9	2.8	42.7	37.1	2.8	76.2	0.258
25	1	60.5	54.9	2.8	34.0	28.4	2.8	76.2	0.237
65 × 50	2-1/2 × 2	76.3	70.3	3.0	60.5	54.9	2.8	88.9	0.432
40	1-1/2	76.3	70.3	3.0	48.6	43.0	2.8	88.9	0.396
32	1-1/4	76.3	70.3	3.0	42.7	37.1	2.8	88.9	0.378
80 × 65	3 × 2-1/2	89.1	83.1	3.0	76.3	70.3	3.0	88.9	0.525
50	2	89.1	83.1	3.0	60.5	54.9	2.8	88.9	0.478
40	1-1/2	89.1	83.1	3.0	48.6	43.0	2.8	88.9	0.444
90 × 80	3-1/2 × 3	101.6	95.6	3.0	89.1	83.1	3.0	101.6	0.695
65	2-1/2	101.6	95.6	3.0	76.3	70.3	3.0	101.6	0.651
50	2	101.6	95.6	3.0	60.5	54.9	2.8	101.6	0.598
100 × 90	4 × 3-1/2	114.3	108.3	3.0	101.6	95.6	3.0	101.6	0.790
80	3	114.3	108.3	3.0	89.1	83.1	3.0	101.6	0.747
65	2-1/2	114.3	108.3	3.0	76.3	70.3	3.0	101.6	0.705
50	2	114.3	108.3	3.0	60.5	54.9	2.8	101.6	0.656
125 × 100	5 × 4	139.8	133.0	3.4	114.3	108.3	3.0	127.0	1.32
90	3-1/2	139.8	133.0	3.4	101.6	95.6	3.0	127.0	1.26
80	3	139.8	133.0	3.4	89.1	83.1	3.0	127.0	1.21
65	2-1/2	139.8	133.0	3.4	76.3	70.3	3.0	127.0	1.15
150 × 125	6 × 5	165.2	158.4	3.4	139.8	133.0	3.4	139.7	1.75
100	4	165.2	158.4	3.4	114.3	108.3	3.0	139.7	1.62
90	3-1/2	165.2	158.4	3.4	101.6	95.6	3.0	139.7	1.56
80	3	165.2	158.4	3.4	89.1	83.1	3.0	139.7	1.50
200 × 150	8 × 6	216.3	208.3	4.0	165.2	158.4	3.4	152.4	2.85
125	5	216.3	208.3	4.0	139.8	133.0	3.4	152.4	2.70
100	4	216.3	208.3	4.0	114.3	108.3	3.0	152.4	2.56
250 × 200	10 × 8	267.4	259.4	4.0	216.3	208.3	4.0	177.8	4.21
150	6	267.4	259.4	4.0	165.2	158.4	3.4	177.8	3.87
125	5	267.4	259.4	4.0	139.8	133.0	3.4	177.8	3.72
300 × 250	12 × 10	318.5	309.5	4.5	267.4	259.4	4.0	203.2	6.55
200	8	318.5	309.5	4.5	216.3	208.3	4.0	203.2	6.11
150	6	318.5	309.5	4.5	165.2	158.4	3.4	203.2	5.72

厚さ 5 S, 10 S, 20 S はステンレス鋼製管継手にのみ適用します。

レギューサ Sch 20 S寸法・重量表

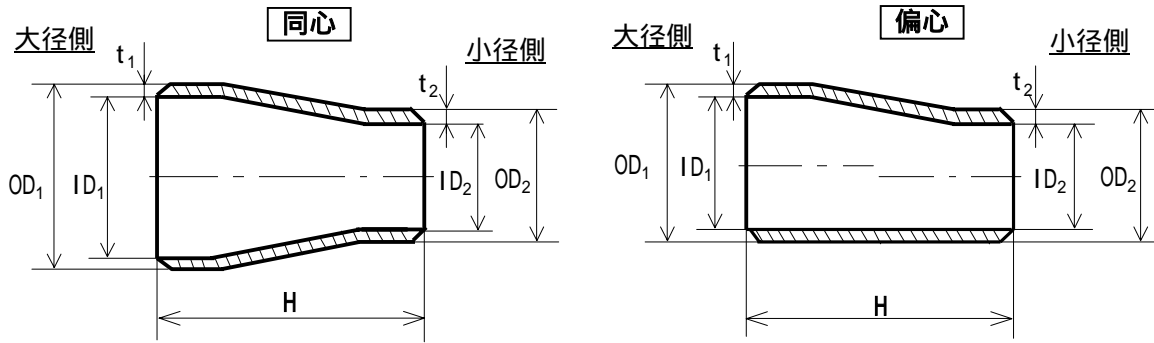


単位：mm

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20 × 15	3/4 × 1/2	27.2	22.2	2.5	21.7	16.7	2.5	38.1	0.052
25 × 20	1 × 3/4	34.0	28.0	3.0	27.2	22.2	2.5	50.8	0.104
15	1/2	34.0	28.0	3.0	21.7	16.7	2.5	50.8	0.094
32 × 25	1-1/4 × 1	42.7	36.7	3.0	34.0	28.0	3.0	50.8	0.133
20	3/4	42.7	36.7	3.0	27.2	22.2	2.5	50.8	0.121
40 × 32	1-1/2 × 1-1/4	48.6	42.6	3.0	42.7	36.7	3.0	63.5	0.213
25	1	48.6	42.6	3.0	34.0	28.0	3.0	63.5	0.192
20	3/4	48.6	42.6	3.0	27.2	22.2	2.5	63.5	0.176
50 × 40	2 × 1-1/2	60.5	53.5	3.5	48.6	42.6	3.0	76.2	0.337
32	1-1/4	60.5	53.5	3.5	42.7	36.7	3.0	76.2	0.318
25	1	60.5	53.5	3.5	34.0	28.0	3.0	76.2	0.292
65 × 50	2-1/2 × 2	76.3	69.3	3.5	60.5	53.5	3.5	88.9	0.487
40	1-1/2	76.3	69.3	3.5	48.6	42.6	3.0	88.9	0.445
32	1-1/4	76.3	69.3	3.5	42.7	36.7	3.0	88.9	0.424
80 × 65	3 × 2-1/2	89.1	81.1	4.0	76.3	69.3	3.5	88.9	0.692
50	2	89.1	81.1	4.0	60.5	53.5	3.5	88.9	0.629
40	1-1/2	89.1	81.1	4.0	48.6	42.6	3.0	88.9	0.583
90 × 80	3-1/2 × 3	101.6	93.6	4.0	89.1	81.1	4.0	101.6	0.917
65	2-1/2	101.6	93.6	4.0	76.3	69.3	3.5	101.6	0.858
50	2	101.6	93.6	4.0	60.5	53.5	3.5	101.6	0.787
100 × 90	4 × 3-1/2	114.3	106.3	4.0	101.6	93.6	4.0	101.6	1.04
80	3	114.3	106.3	4.0	89.1	81.1	4.0	101.6	0.986
65	2-1/2	114.3	106.3	4.0	76.3	69.3	3.5	101.6	0.930
50	2	114.3	106.3	4.0	60.5	53.5	3.5	101.6	0.864
125 × 100	5 × 4	139.8	129.8	5.0	114.3	106.3	4.0	127.0	1.92
90	3-1/2	139.8	129.8	5.0	101.6	93.6	4.0	127.0	1.83
80	3	139.8	129.8	5.0	89.1	81.1	4.0	127.0	1.75
65	2-1/2	139.8	129.8	5.0	76.3	69.3	3.5	127.0	1.66
150 × 125	6 × 5	165.2	155.2	5.0	139.8	129.8	5.0	139.7	2.55
100	4	165.2	155.2	5.0	114.3	106.3	4.0	139.7	2.36
90	3-1/2	165.2	155.2	5.0	101.6	93.6	4.0	139.7	2.27
80	3	165.2	155.2	5.0	89.1	81.1	4.0	139.7	2.18
200 × 150	8 × 6	216.3	203.3	6.5	165.2	155.2	5.0	152.4	4.56
125	5	216.3	203.3	6.5	139.8	129.8	5.0	152.4	4.32
100	4	216.3	203.3	6.5	114.3	106.3	4.0	152.4	4.09
250 × 200	10 × 8	267.4	254.4	6.5	216.3	203.3	6.5	177.8	6.77
150	6	267.4	254.4	6.5	165.2	155.2	5.0	177.8	6.22
125	5	267.4	254.4	6.5	139.8	129.8	5.0	177.8	5.97
300 × 250	12 × 10	318.5	305.5	6.5	267.4	254.4	6.5	203.2	9.40
200	8	318.5	305.5	6.5	216.3	203.3	6.5	203.2	8.76
150	6	318.5	305.5	6.5	165.2	155.2	5.0	203.2	8.19

厚さ 5 S, 10 S, 20 S はステンレス鋼製管継手にのみ適用します。

レギューサ Sch40寸法・重量表

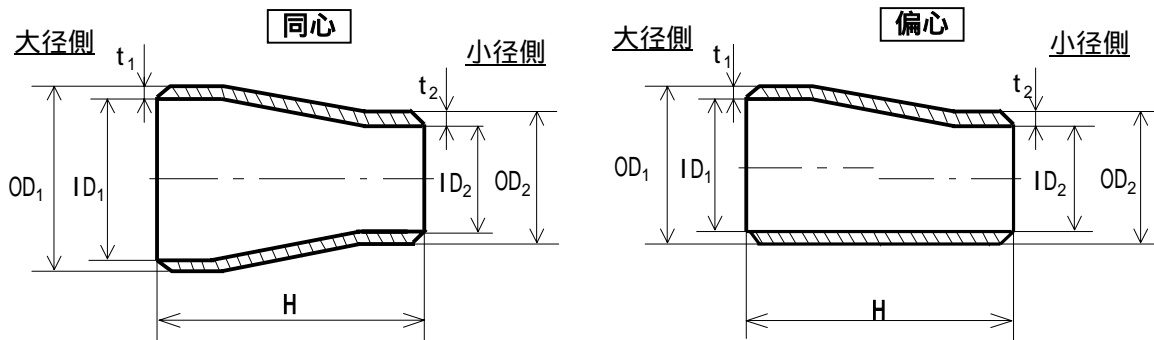


単位：mm

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20 × 15	3/4 × 1/2	27.2	21.4	2.9	21.7	16.1	2.8	38.1	0.059
25 × 20	1 × 3/4	34.0	27.2	3.4	27.2	21.4	2.9	50.8	0.116
15	1/2	34.0	27.2	3.4	21.7	16.1	2.8	50.8	0.105
32 × 25	1-1/4 × 1	42.7	35.5	3.6	34.0	27.2	3.4	50.8	0.157
20	3/4	42.7	35.5	3.6	27.2	21.4	2.9	50.8	0.143
15	1/2	42.7	35.5	3.6	21.7	16.1	2.8	50.8	0.132
40 × 32	1-1/2 × 1-1/4	48.6	41.2	3.7	42.7	35.5	3.6	63.5	0.244
25	1	48.6	41.2	3.7	34.0	27.2	3.4	63.5	0.220
20	3/4	48.6	41.2	3.7	27.2	21.4	2.9	63.5	0.201
15	1/2	48.6	41.2	3.7	21.7	16.1	2.8	63.5	0.187
50 × 40	2 × 1-1/2	60.5	52.7	3.9	48.6	41.2	3.7	76.2	0.372
32	1-1/4	60.5	52.7	3.9	42.7	35.5	3.6	76.2	0.352
25	1	60.5	52.7	3.9	34.0	27.2	3.4	76.2	0.322
20	3/4	60.5	52.7	3.9	27.2	21.4	2.9	76.2	0.300
65 × 50	2-1/2 × 2	76.3	65.9	5.2	60.5	52.7	3.9	88.9	0.723
40	1-1/2	76.3	65.9	5.2	48.6	41.2	3.7	88.9	0.660
32	1-1/4	76.3	65.9	5.2	42.7	35.5	3.6	88.9	0.630
25	1	76.3	65.9	5.2	34.0	27.2	3.4	88.9	0.585
80 × 65	3 × 2-1/2	89.1	78.1	5.5	76.3	65.9	5.2	88.9	0.933
50	2	89.1	78.1	5.5	60.5	52.7	3.9	88.9	0.846
40	1-1/2	89.1	78.1	5.5	48.6	41.2	3.7	88.9	0.783
32	1-1/4	89.1	78.1	5.5	42.7	35.5	3.6	88.9	0.752
25	1	89.1	78.1	5.5	34.0	27.2	3.4	88.9	0.707
90 × 80	3-1/2 × 3	101.6	90.2	5.7	89.1	78.1	5.5	101.6	1.28
65	2-1/2	101.6	90.2	5.7	76.3	65.9	5.2	101.6	1.20
50	2	101.6	90.2	5.7	60.5	52.7	3.9	101.6	1.10
40	1-1/2	101.6	90.2	5.7	48.6	41.2	3.7	101.6	1.02
100 × 90	4 × 3-1/2	114.3	102.3	6.0	101.6	90.2	5.7	101.6	1.53
80	3	114.3	102.3	6.0	89.1	78.1	5.5	101.6	1.45
65	2-1/2	114.3	102.3	6.0	76.3	65.9	5.2	101.6	1.36
50	2	114.3	102.3	6.0	60.5	52.7	3.9	101.6	1.27
40	1-1/2	114.3	102.3	6.0	48.6	41.2	3.7	101.6	1.19
125 × 100	5 × 4	139.8	126.6	6.6	114.3	102.3	6.0	127.0	2.50
90	3-1/2	139.8	126.6	6.6	101.6	90.2	5.7	127.0	2.38
80	3	139.8	126.6	6.6	89.1	78.1	5.5	127.0	2.27
65	2-1/2	139.8	126.6	6.6	76.3	65.9	5.2	127.0	2.16
50	2	139.8	126.6	6.6	60.5	52.7	3.9	127.0	2.02

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
150×125	6 × 5	165.2	151.0	7.1	139.8	126.6	6.6	139.7	3.57
100	4	165.2	151.0	7.1	114.3	102.3	6.0	139.7	3.30
90	3-1/2	165.2	151.0	7.1	101.6	90.2	5.7	139.7	3.17
80	3	165.2	151.0	7.1	89.1	78.1	5.5	139.7	3.04
65	2-1/2	165.2	151.0	7.1	76.3	65.9	5.2	139.7	2.92
50	2	165.2	151.0	7.1	60.5	52.7	3.9	139.7	2.76
175×150	7 × 6	190.7	175.7	7.5	165.2	151.0	7.1	152.4	4.82
125	5	190.7	175.7	7.5	139.8	126.6	6.6	152.4	4.58
100	4	190.7	175.7	7.5	114.3	102.3	6.0	152.4	4.26
200×150	8 × 6	216.3	199.9	8.2	165.2	151.0	7.1	152.4	5.70
125	5	216.3	199.9	8.2	139.8	126.6	6.6	152.4	5.39
100	4	216.3	199.9	8.2	114.3	102.3	6.0	152.4	5.10
250×200	10 × 8	267.4	248.8	9.3	216.3	199.9	8.2	177.8	9.58
150	6	267.4	248.8	9.3	165.2	151.0	7.1	177.8	8.78
125	5	267.4	248.8	9.3	139.8	126.6	6.6	177.8	8.41
300×250	12 × 10	318.5	297.9	10.3	267.4	248.8	9.3	203.2	14.7
200	8	318.5	297.9	10.3	216.3	199.9	8.2	203.2	13.7
150	6	318.5	297.9	10.3	165.2	151.0	7.1	203.2	12.8
350×300	14 × 12	355.6	333.4	11.1	318.5	297.9	10.3	330.2	29.5
250	10	355.6	333.4	11.1	267.4	248.8	9.3	330.2	27.4
200	8	355.6	333.4	11.1	216.3	199.9	8.2	330.2	25.4
400×350	16 × 14	406.4	381.0	12.7	355.6	333.4	11.1	355.6	41.1
300	12	406.4	381.0	12.7	318.5	297.9	10.3	355.6	39.2
250	10	406.4	381.0	12.7	267.4	248.8	9.3	355.6	36.8
200	8	406.4	381.0	12.7	216.3	199.9	8.2	203.2	34.4
450×400	18 × 16	457.2	428.6	14.3	406.4	381.0	12.7	381.0	56.2
350	14	457.2	428.6	14.3	355.6	333.4	11.1	381.0	53.1
300	12	457.2	428.6	14.3	318.5	297.9	10.3	381.0	51.0
250	10	457.2	428.6	14.3	267.4	248.8	9.3	381.0	48.2
500×450	20 × 18	508.0	477.8	15.1	457.2	428.6	14.3	508.0	88.5
400	16	508.0	477.8	15.1	406.4	381.0	12.7	508.0	84.0
350	14	508.0	477.8	15.1	355.6	333.4	11.1	508.0	79.7
300	12	508.0	477.8	15.1	318.5	297.9	10.3	508.0	76.6

- 1 . 印は日本工業規格(J I S)に含まれておりません。
- 2 . 印の偏心レジャーサは製作しておりません。

レジャーサ Sch 80寸法・重量表

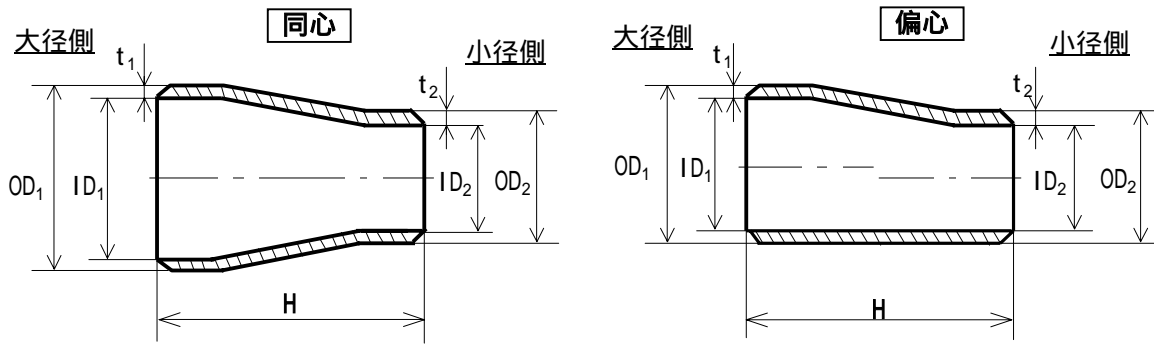


単位：mm

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20 × 15	3/4 × 1/2	27.2	19.4	3.9	21.7	14.3	3.7	38.1	0.075
25 × 20	1 × 3/4	34.0	25.0	4.5	27.2	19.4	3.9	50.8	0.147
15	1/2	34.0	25.0	4.5	21.7	14.3	3.7	50.8	0.133
32 × 25	1-1/4 × 1	42.7	32.9	4.9	34.0	25.0	4.5	50.8	0.206
20	3/4	42.7	32.9	4.9	27.2	19.4	3.9	50.8	0.186
15	1/2	42.7	32.9	4.9	21.7	14.3	3.7	50.8	0.171
40 × 32	1-1/2 × 1-1/4	48.6	38.4	5.1	42.7	32.9	4.9	63.5	0.324
25	1	48.6	38.4	5.1	34.0	25.0	4.5	63.5	0.291
20	3/4	48.6	38.4	5.1	27.2	19.4	3.9	63.5	0.266
15	1/2	48.6	38.4	5.1	21.7	14.3	3.7	63.5	0.245
50 × 40	2 × 1-1/2	60.5	49.5	5.5	48.6	38.4	5.1	76.2	0.508
32	1-1/4	60.5	49.5	5.5	42.7	32.9	4.9	76.2	0.479
25	1	60.5	49.5	5.5	34.0	25.0	4.5	76.2	0.438
20	3/4	60.5	49.5	5.5	27.2	19.4	3.9	76.2	0.406
65 × 50	2-1/2 × 2	76.3	62.3	7.0	60.5	49.5	5.5	88.9	0.945
40	1-1/2	76.3	62.3	7.0	48.6	38.4	5.1	88.9	0.861
32	1-1/4	76.3	62.3	7.0	42.7	32.9	4.9	88.9	0.820
25	1	76.3	62.3	7.0	34.0	25.0	4.5	88.9	0.759
80 × 65	3 × 2-1/2	89.1	73.9	7.6	76.3	62.3	7.0	88.9	1.25
50	2	89.1	73.9	7.6	60.5	49.5	5.5	88.9	1.13
40	1-1/2	89.1	73.9	7.6	48.6	38.4	5.1	88.9	1.05
32	1-1/4	89.1	73.9	7.6	42.7	32.9	4.9	88.9	1.00
25	1	89.1	73.9	7.6	34.0	25.0	4.5	88.9	0.941
90 × 80	3-1/2 × 3	101.6	85.4	8.1	89.1	73.9	7.6	101.6	1.77
65	2-1/2	101.6	85.4	8.1	76.3	62.3	7.0	101.6	1.65
50	2	101.6	85.4	8.1	60.5	49.5	5.5	101.6	1.51
40	1-1/2	101.6	85.4	8.1	48.6	38.4	5.1	101.6	1.40
100 × 90	4 × 3-1/2	114.3	97.1	8.6	101.6	85.4	8.1	101.6	2.14
80	3	114.3	97.1	8.6	89.1	73.9	7.6	101.6	2.02
65	2-1/2	114.3	97.1	8.6	76.3	62.3	7.0	101.6	1.90
50	2	114.3	97.1	8.6	60.5	49.5	5.5	101.6	1.76
40	1-1/2	114.3	97.1	8.6	48.6	38.4	5.1	101.6	1.65
125 × 100	5 × 4	139.8	120.8	9.5	114.3	97.1	8.6	127.0	3.51
90	3-1/2	139.8	120.8	9.5	101.6	85.4	8.1	127.0	3.34
80	3	139.8	120.8	9.5	89.1	73.9	7.6	127.0	3.18
65	2-1/2	139.8	120.8	9.5	76.3	62.3	7.0	127.0	3.02
50	2	139.8	120.8	9.5	60.5	49.5	5.5	127.0	2.82

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
150×125	6 × 5	165.2	143.2	11.0	139.8	120.8	9.5	139.7	5.38
100	4	165.2	143.2	11.0	114.3	97.1	8.6	139.7	4.96
90	3-1/2	165.2	143.2	11.0	101.6	85.4	8.1	139.7	4.75
80	3	165.2	143.2	11.0	89.1	73.9	7.6	139.7	4.56
65	2-1/2	165.2	143.2	11.0	76.3	62.3	7.0	139.7	4.36
50	2	165.2	143.2	11.0	60.5	49.5	5.5	139.7	4.12
200×150	8 × 6	216.3	190.9	12.7	165.2	143.2	11.0	152.4	8.61
125	5	216.3	190.9	12.7	139.8	120.8	9.5	152.4	8.13
100	4	216.3	190.9	12.7	114.3	97.1	8.6	152.4	7.68
250×200	10 × 8	267.4	237.2	15.1	216.3	190.9	12.7	177.8	15.2
150	6	267.4	237.2	15.1	165.2	143.2	11.0	177.8	13.9
125	5	267.4	237.2	15.1	139.8	120.8	9.5	177.8	13.3
300×250	12 × 10	318.5	283.7	17.4	267.4	237.2	15.1	203.2	24.2
200	8	318.5	283.7	17.4	216.3	190.9	12.7	203.2	22.5
150	6	318.5	283.7	17.4	165.2	143.2	11.0	203.2	20.9
350×300	14 × 12	355.6	317.6	19.0	318.5	283.7	17.4	330.2	49.3
250	10	355.6	317.6	19.0	267.4	237.2	15.1	330.2	45.6
200	8	355.6	317.6	19.0	216.3	190.9	12.7	330.2	42.2
400×350	16 × 14	406.4	363.6	21.4	355.6	317.6	19.0	355.6	67.6
300	12	406.4	363.6	21.4	318.5	283.7	17.4	355.6	64.5
250	10	406.4	363.6	21.4	267.4	237.2	15.1	355.6	60.3
200	8	406.4	363.6	21.4	216.3	190.9	12.7	355.6	56.3
450×400	18 × 16	457.2	409.6	23.8	406.4	363.6	21.4	381.0	91.4
350	14	457.2	409.6	23.8	355.6	317.6	19.0	381.0	86.3
300	12	457.2	409.6	23.8	318.5	283.7	17.4	381.0	82.7
250	10	457.2	409.6	23.8	267.4	237.2	15.1	381.0	78.0
500×450	20 × 18	508.0	455.6	26.2	457.2	409.6	23.8	508.0	150.0
400	16	508.0	455.6	26.2	406.4	363.6	21.4	508.0	142.0
350	14	508.0	455.6	26.2	355.6	317.6	19.0	508.0	135.0
300	12	508.0	455.6	26.2	318.5	283.7	17.4	508.0	129.0

1. 印は日本工業規格(J I S)に含まれておりません。
2. 印の偏心レジューサは製作しておりません。

レジャーサ Sch 160寸法・重量表

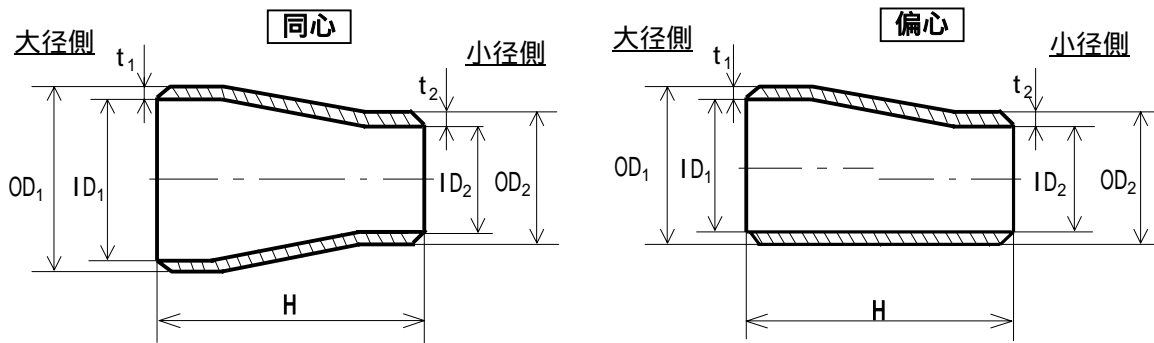



単位：mm

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
20 × 15	3/4 × 1/2	27.2	16.2	5.5	21.7	12.3	4.7	38.1	0.098
25 × 20	1 × 3/4	34.0	21.2	6.4	27.2	16.2	5.5	50.8	0.194
15	1/2	34.0	21.2	6.4	21.7	12.3	4.7	50.8	0.173
32 × 25	1-1/4 × 1	42.7	29.9	6.4	34.0	21.2	6.4	50.8	0.257
20	3/4	42.7	29.9	6.4	27.2	16.2	5.5	50.8	0.231
15	1/2	42.7	29.9	6.4	21.7	12.3	4.7	50.8	0.211
40 × 32	1-1/2 × 1-1/4	48.6	34.4	7.1	42.7	29.9	6.4	63.5	0.429
25	1	48.6	34.4	7.1	34.0	21.2	6.4	63.5	0.383
20	3/4	48.6	34.4	7.1	27.2	16.2	5.5	63.5	0.347
15	1/2	48.6	34.4	7.1	21.7	12.3	4.7	63.5	0.319
50 × 40	2 × 1-1/2	60.5	43.1	8.7	48.6	34.4	7.1	76.2	0.751
32	1-1/4	60.5	43.1	8.7	42.7	29.9	6.4	76.2	0.706
25	1	60.5	43.1	8.7	34.0	21.2	6.4	76.2	0.639
20	3/4	60.5	43.1	8.7	27.2	16.2	5.5	76.2	0.588
65 × 50	2-1/2 × 2	76.3	57.3	9.5	60.5	43.1	8.7	88.9	1.23
40	1-1/2	76.3	57.3	9.5	48.6	34.4	7.1	88.9	1.12
32	1-1/4	76.3	57.3	9.5	42.7	29.9	6.4	88.9	1.06
25	1	76.3	57.3	9.5	34.0	21.2	6.4	88.9	0.976
80 × 65	3 × 2-1/2	89.1	66.9	11.1	76.3	57.3	9.5	88.9	1.75
50	2	89.1	66.9	11.1	60.5	43.1	8.7	88.9	1.57
40	1-1/2	89.1	66.9	11.1	48.6	34.4	7.1	88.9	1.44
32	1-1/4	89.1	66.9	11.1	42.7	29.9	6.4	88.9	1.38
25	1	89.1	66.9	11.1	34.0	21.2	6.4	88.9	1.28
90 × 80	3-1/2 × 3	101.6	76.2	12.7	89.1	66.9	11.1	101.6	2.63
65	2-1/2	101.6	76.2	12.7	76.3	57.3	9.5	101.6	2.44
50	2	101.6	76.2	12.7	60.5	43.1	8.7	101.6	2.22
40	1-1/2	101.6	76.2	12.7	48.6	34.4	7.1	101.6	2.05
100 × 90	4 × 3-1/2	114.3	87.3	13.5	101.6	76.2	12.7	101.6	3.20
80	3	114.3	87.3	13.5	89.1	66.9	11.1	101.6	3.00
65	2-1/2	114.3	87.3	13.5	76.3	57.3	9.5	101.6	2.81
50	2	114.3	87.3	13.5	60.5	43.1	8.7	101.6	2.58
40	1-1/2	114.3	87.3	13.5	48.6	34.4	7.1	101.6	2.41
125 × 100	5 × 4	139.8	108.0	15.9	114.3	87.3	13.5	127.0	5.56
90	3-1/2	139.8	108.0	15.9	101.6	76.2	12.7	127.0	5.27
80	3	139.8	108.0	15.9	89.1	66.9	11.1	127.0	5.00
65	2-1/2	139.8	108.0	15.9	76.3	57.3	9.5	127.0	4.73
50	2	139.8	108.0	15.9	60.5	43.1	8.7	127.0	4.39

径の呼び(大径側×小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
150×125	6 × 5	165.2	128.8	18.2	139.8	108.0	15.9	139.7	8.45
100	4	165.2	128.8	18.2	114.3	87.3	13.5	139.7	7.74
90	3-1/2	165.2	128.8	18.2	101.6	76.2	12.7	139.7	7.40
80	3	165.2	128.8	18.2	89.1	66.9	11.1	139.7	7.08
65	2-1/2	165.2	128.8	18.2	76.3	57.3	9.5	139.7	6.74
50	2	165.2	128.8	18.2	60.5	43.1	8.7	139.7	6.33
200×150	8 × 6	216.3	170.3	23.0	165.2	128.8	18.2	152.4	14.7
125	5	216.3	170.3	23.0	139.8	108.0	15.9	152.4	13.8
100	4	216.3	170.3	23.0	114.3	87.3	13.5	152.4	13.0
250×200	10 × 8	267.4	210.2	28.6	216.3	170.3	23.0	177.8	27.0
150	6	267.4	210.2	28.6	165.2	128.8	18.2	177.8	24.5
125	5	267.4	210.2	28.6	139.8	108.0	15.9	177.8	23.3
300×250	12 × 10	318.5	251.9	33.3	267.4	210.2	28.6	203.2	43.6
200	8	318.5	251.9	33.3	216.3	170.3	23.0	203.2	40.3
150	6	318.5	251.9	33.3	165.2	128.8	18.2	203.2	37.2
350×300	14 × 12	355.6	284.2	35.7	318.5	251.9	33.3	330.2	87.7
250	10	355.6	284.2	35.7	267.4	210.2	28.6	330.2	80.8
200	8	355.6	284.2	35.7	216.3	170.3	23.0	330.2	74.3
400×350	16 × 14	406.4	325.4	40.5	355.6	284.2	35.7	355.6	121.0
300	12	406.4	325.4	40.5	318.5	251.9	33.3	355.6	115.0
250	10	406.4	325.4	40.5	267.4	210.2	28.6	355.6	107.0
450×400	18 × 16	457.2	366.8	45.2	406.4	325.4	40.5	381.0	165.0
350	14	457.2	366.8	45.2	355.6	284.2	35.7	381.0	155.0
500×450	20 × 18	508.0	408.0	50.0	457.2	366.8	45.2	508.0	271.0
400	16	508.0	408.0	50.0	406.4	325.4	40.5	508.0	256.0
350	14	508.0	408.0	50.0	355.6	284.2	35.7	508.0	242.0

1. 印は日本工業規格(J I S)に含まれておりません。

鋼板製 レジューサ L G寸法・重量表

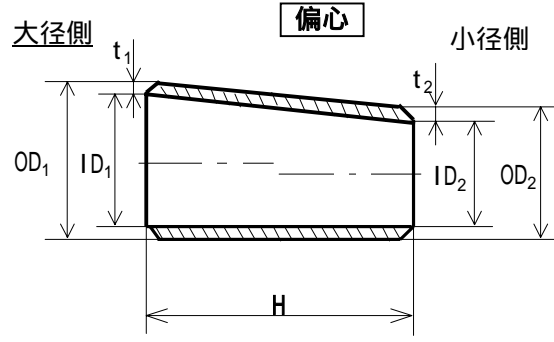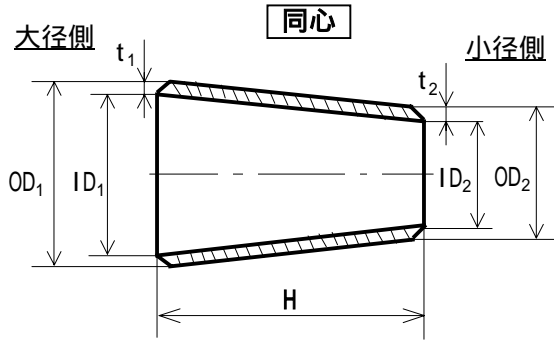


単位：mm

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
400 × 350	16 × 14	406.4	390.8	7.9	355.6	340.0	7.9	355.6	25.8
300	12	406.4	390.8	7.9	318.5	302.9	7.9	355.6	24.6
250	10	406.4	390.8	7.9	267.4	251.8	7.9	355.6	22.8
450 × 400	18 × 16	457.2	441.6	7.9	406.4	390.8	7.9	381.0	31.5
350	14	457.2	441.6	7.9	355.6	340.0	7.9	381.0	29.6
300	12	457.2	441.6	7.9	318.5	302.9	7.9	381.0	28.2
500 × 450	20 × 18	508.0	492.4	7.9	457.2	441.6	7.9	508.0	47.0
400	16	508.0	492.4	7.9	406.4	390.8	7.9	508.0	44.5
350	14	508.0	492.4	7.9	355.6	340.0	7.9	508.0	42.0
550 × 500	22 × 20	558.8	543.2	7.9	508.0	492.4	7.9	508.0	52.0
450	18	558.8	543.2	7.9	457.2	441.6	7.9	508.0	49.5
400	16	558.8	543.2	7.9	406.4	390.8	7.9	508.0	47.0
600 × 550	24 × 22	609.6	594.0	7.9	558.8	543.2	7.9	508.0	57.0
500	20	609.6	594.0	7.9	508.0	492.4	7.9	508.0	54.5
450	18	609.6	594.0	7.9	457.2	441.6	7.9	508.0	52.0
400	16	609.6	594.0	7.9	406.4	390.8	7.9	508.0	49.5
650 × 600	26 × 24	660.4	644.8	7.9	609.6	594.0	7.9	609.6	74.5
550	22	660.4	644.8	7.9	558.8	543.2	7.9	609.6	71.5
500	20	660.4	644.8	7.9	508.0	492.4	7.9	609.6	68.4
450	18	660.4	644.8	7.9	457.2	441.6	7.9	609.6	65.4
700 × 650	28 × 26	711.2	695.6	7.9	660.4	644.8	7.9	609.6	80.5
600	24	711.2	695.6	7.9	609.6	594.0	7.9	609.6	77.5
550	22	711.2	695.6	7.9	558.8	543.2	7.9	609.6	74.5
500	20	711.2	695.6	7.9	508.0	492.4	7.9	609.6	71.5
750 × 700	30 × 28	762.0	746.4	7.9	711.2	695.6	7.9	609.6	86.5
650	26	762.0	746.4	7.9	660.4	644.8	7.9	609.6	83.5
600	24	762.0	746.4	7.9	609.6	594.0	7.9	609.6	80.5
550	22	762.0	746.4	7.9	558.8	543.2	7.9	609.6	77.5
800 × 750	32 × 30	812.8	797.2	7.9	762.0	746.4	7.9	609.6	92.0
700	28	812.8	797.2	7.9	711.2	695.6	7.9	609.6	89.6
650	26	812.8	797.2	7.9	660.4	644.8	7.9	609.6	86.5
600	24	812.8	797.2	7.9	609.6	594.0	7.9	609.6	83.5
850 × 800	34 × 32	863.6	848.0	7.9	812.8	797.2	7.9	609.6	98.6
750	30	863.6	848.0	7.9	762.0	746.4	7.9	609.6	95.6
700	28	863.6	848.0	7.9	711.2	695.6	7.9	609.6	92.6
650	26	863.6	848.0	7.9	660.4	644.8	7.9	609.6	89.6
900 × 850	36 × 34	914.4	898.8	7.9	863.6	848.0	7.9	609.6	105.0
800	32	914.4	898.8	7.9	812.8	797.2	7.9	609.6	102.0
750	30	914.4	898.8	7.9	762.0	746.4	7.9	609.6	98.6
700	28	914.4	898.8	7.9	711.2	695.6	7.9	609.6	95.6

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
950 × 900	38 × 36	965.2	949.6	7.9	914.4	898.8	7.9	609.6	111.0
850	34	965.2	949.6	7.9	863.6	848.0	7.9	609.6	108.0
800	32	965.2	949.6	7.9	812.8	797.2	7.9	609.6	105.0
750	30	965.2	949.6	7.9	762.0	746.4	7.9	609.6	102.0
1000 × 950	40 × 38	1016.0	1000.4	7.9	965.2	949.6	7.9	609.6	117.0
900	36	1016.0	1000.4	7.9	914.4	898.8	7.9	609.6	114.0
850	34	1016.0	1000.4	7.9	863.6	848.0	7.9	609.6	111.0
800	32	1016.0	1000.4	7.9	812.8	797.2	7.9	609.6	108.0
1050 × 1000	42 × 40	1066.8	1051.2	7.9	1016.0	1000.4	7.9	609.6	123.0
950	38	1066.8	1051.2	7.9	965.2	949.6	7.9	609.6	120.0
900	36	1066.8	1051.2	7.9	914.4	898.8	7.9	609.6	117.0
850	34	1066.8	1051.2	7.9	863.6	848.0	7.9	609.6	114.0
1100 × 1050	44 × 42	1117.6	1102.0	7.9	1066.8	1051.2	7.9	609.6	129.0
1000	40	1117.6	1102.0	7.9	1016.0	1000.4	7.9	609.6	126.0
950	38	1117.6	1102.0	7.9	965.2	949.6	7.9	609.6	123.0
900	36	1117.6	1102.0	7.9	914.4	898.8	7.9	609.6	120.0
1150 × 1100	46 × 44	1168.4	1152.8	7.9	1117.6	1102.0	7.9	711.2	157.0
1050	42	1168.4	1152.8	7.9	1066.8	1051.2	7.9	711.2	154.0
1000	40	1168.4	1152.8	7.9	1016.0	1000.4	7.9	711.2	150.0
950	38	1168.4	1152.8	7.9	965.2	949.6	7.9	711.2	147.0
1200 × 1150	48 × 46	1219.2	1203.6	7.9	1168.4	1152.8	7.9	711.2	164.0
1100	44	1219.2	1203.6	7.9	1117.6	1102.0	7.9	711.2	161.0
1050	42	1219.2	1203.6	7.9	1066.8	1051.2	7.9	711.2	157.0
1000	40	1219.2	1203.6	7.9	1016.0	1000.4	7.9	711.2	154.0

鋼板製 レジューサ STD寸法・重量表

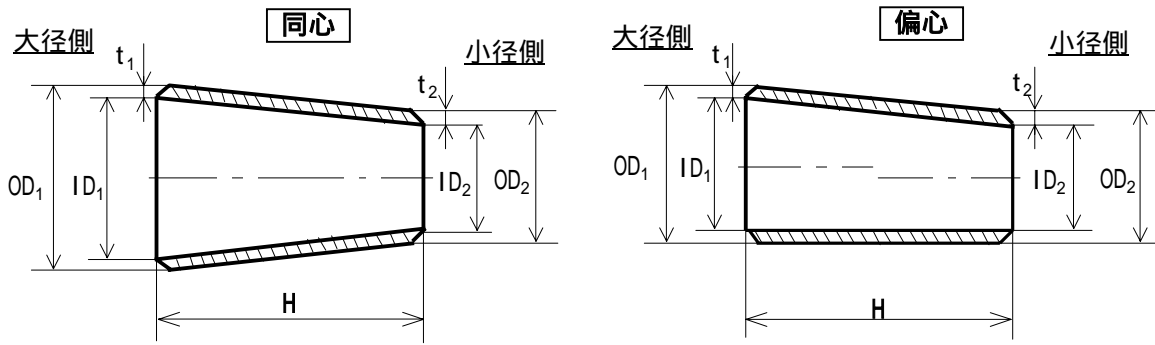


単位：mm

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
400 × 350	16 × 14	406.4	387.4	9.5	355.6	336.6	9.5	355.6	31.0
	300	406.4	387.4	9.5	318.5	299.5	9.5	355.6	29.4
	250	406.4	387.4	9.5	267.4	248.4	9.5	355.6	27.3
450 × 400	18 × 16	457.2	438.2	9.5	406.4	387.4	9.5	381.0	37.7
	350	457.2	438.2	9.5	355.6	336.6	9.5	381.0	35.4
	300	457.2	438.2	9.5	318.5	299.5	9.5	381.0	33.8
500 × 450	20 × 18	508.0	489.0	9.5	457.2	438.2	9.5	508.0	56.3
	400	508.0	489.0	9.5	406.4	387.4	9.5	508.0	53.3
	350	508.0	489.0	9.5	355.6	336.6	9.5	508.0	50.3
550 × 500	22 × 20	558.8	539.8	9.5	508.0	489.0	9.5	508.0	62.4
	450	558.8	539.8	9.5	457.2	438.2	9.5	508.0	59.3
	400	558.8	539.8	9.5	406.4	387.4	9.5	508.0	56.3
600 × 550	24 × 22	609.6	590.6	9.5	558.8	539.8	9.5	508.0	68.4
	500	609.6	590.6	9.5	508.0	489.0	9.5	508.0	65.4
	450	609.6	590.6	9.5	457.2	438.2	9.5	508.0	62.4
	400	609.6	590.6	9.5	406.4	387.4	9.5	508.0	59.3
650 × 600	26 × 24	660.4	641.4	9.5	609.6	590.6	9.5	609.6	89.3
	550	660.4	641.4	9.5	558.8	539.8	9.5	609.6	85.7
	500	660.4	641.4	9.5	508.0	489.0	9.5	609.6	82.1
	450	660.4	641.4	9.5	457.2	438.2	9.5	609.6	78.5
700 × 650	28 × 26	711.2	692.2	9.5	660.4	641.4	9.5	609.6	96.6
	600	711.2	692.2	9.5	609.6	590.6	9.5	609.6	93.0
	550	711.2	692.2	9.5	558.8	539.8	9.5	609.6	89.3
	500	711.2	692.2	9.5	508.0	489.0	9.5	609.6	85.7
750 × 700	30 × 28	762.0	743.0	9.5	711.2	692.2	9.5	609.6	104.0
	650	762.0	743.0	9.5	660.4	641.4	9.5	609.6	100.0
	600	762.0	743.0	9.5	609.6	590.6	9.5	609.6	96.6
	550	762.0	743.0	9.5	558.8	539.8	9.5	609.6	93.0
800 × 750	32 × 30	812.8	793.8	9.5	762.0	743.0	9.5	609.6	111.0
	700	812.8	793.8	9.5	711.2	692.2	9.5	609.6	107.0
	650	812.8	793.8	9.5	660.4	641.4	9.5	609.6	104.0
	600	812.8	793.8	9.5	609.6	590.6	9.5	609.6	100.0
850 × 800	34 × 32	863.6	844.6	9.5	812.8	793.8	9.5	609.6	118.0
	750	863.6	844.6	9.5	762.0	743.0	9.5	609.6	115.0
	700	863.6	844.6	9.5	711.2	692.2	9.5	609.6	111.0
	650	863.6	844.6	9.5	660.4	641.4	9.5	609.6	107.0
900 × 850	36 × 34	914.4	895.4	9.5	863.6	844.6	9.5	609.6	126.0
	800	914.4	895.4	9.5	812.8	793.8	9.5	609.6	122.0
	750	914.4	895.4	9.5	762.0	743.0	9.5	609.6	118.0
	700	914.4	895.4	9.5	711.2	692.2	9.5	609.6	115.0

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
950 × 900	38 × 36	965.2	946.2	9.5	914.4	895.4	9.5	609.6	133.0
850	34	965.2	946.2	9.5	863.6	844.6	9.5	609.6	129.0
800	32	965.2	946.2	9.5	812.8	793.8	9.5	609.6	126.0
750	30	965.2	946.2	9.5	762.0	743.0	9.5	609.6	122.0
1000 × 950	40 × 38	1016.0	997.0	9.5	965.2	946.2	9.5	609.6	140.0
900	36	1016.0	997.0	9.5	914.4	895.4	9.5	609.6	136.0
850	34	1016.0	997.0	9.5	863.6	844.6	9.5	609.6	133.0
800	32	1016.0	997.0	9.5	812.8	793.8	9.5	609.6	129.0
1050 × 1000	42 × 40	1066.8	1047.8	9.5	1016.0	997.0	9.5	609.6	147.0
950	38	1066.8	1047.8	9.5	965.2	946.2	9.5	609.6	144.0
900	36	1066.8	1047.8	9.5	914.4	895.4	9.5	609.6	140.0
850	34	1066.8	1047.8	9.5	863.6	844.6	9.5	609.6	136.0
1100 × 1050	44 × 42	1117.6	1098.6	9.5	1066.8	1047.8	9.5	609.6	155.0
1000	40	1117.6	1098.6	9.5	1016.0	997.0	9.5	609.6	151.0
950	38	1117.6	1098.6	9.5	965.2	946.2	9.5	609.6	147.0
900	36	1117.6	1098.6	9.5	914.4	895.4	9.5	609.6	144.0
1150 × 1100	46 × 44	1168.4	1149.4	9.5	1117.6	1098.6	9.5	711.2	189.0
1050	42	1168.4	1149.4	9.5	1066.8	1047.8	9.5	711.2	185.0
1000	40	1168.4	1149.4	9.5	1016.0	997.0	9.5	711.2	180.0
950	38	1168.4	1149.4	9.5	965.2	946.2	9.5	711.2	176.0
1200 × 1150	48 × 46	1219.2	1200.2	9.5	1168.4	1149.4	9.5	711.2	197.0
1100	44	1219.2	1200.2	9.5	1117.6	1098.6	9.5	711.2	193.0
1050	42	1219.2	1200.2	9.5	1066.8	1047.8	9.5	711.2	189.0
1000	40	1219.2	1200.2	9.5	1016.0	997.0	9.5	711.2	185.0

鋼板製 レジューサ X S寸法・重量表

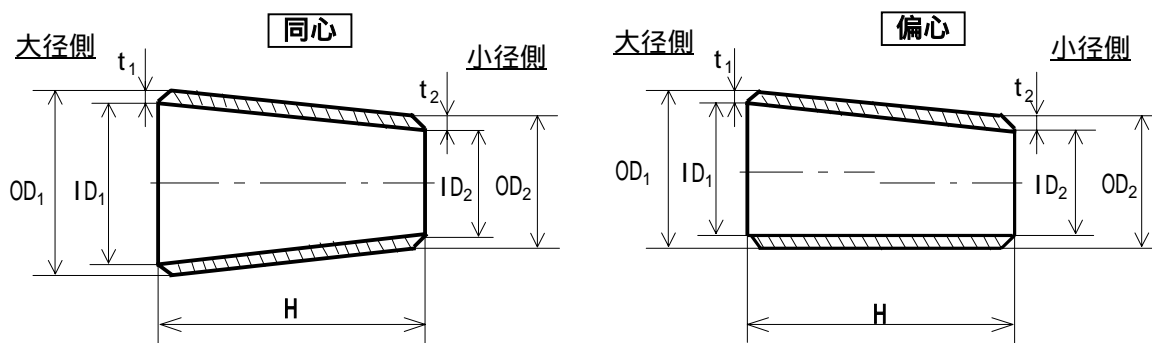

単位：mm

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
400 × 350	16 × 14	406.4	381.4	12.5	355.6	330.6	12.5	355.6	41.0
300	12	406.4	381.4	12.5	318.5	293.5	12.5	355.6	39.0
250	10	406.4	381.4	12.5	267.4	242.4	12.5	355.6	36.1
450 × 400	18 × 16	457.2	432.2	12.5	406.4	381.4	12.5	381.0	50.0
350	14	457.2	432.2	12.5	355.6	330.6	12.5	381.0	47.0
300	12	457.2	432.2	12.5	318.5	293.5	12.5	381.0	44.8
500 × 450	20 × 18	508.0	483.0	12.5	457.2	432.2	12.5	508.0	74.8
400	16	508.0	483.0	12.5	406.4	381.4	12.5	508.0	70.7
350	14	508.0	483.0	12.5	355.6	330.6	12.5	508.0	66.7
550 × 500	22 × 20	558.8	533.8	12.5	508.0	483.0	12.5	508.0	82.8
450	18	558.8	533.8	12.5	457.2	432.2	12.5	508.0	78.8
400	16	558.8	533.8	12.5	406.4	381.4	12.5	508.0	74.8
600 × 550	24 × 22	609.6	584.6	12.5	558.8	533.8	12.5	508.0	90.9
500	20	609.6	584.6	12.5	508.0	483.0	12.5	508.0	86.9
450	18	609.6	584.6	12.5	457.2	432.2	12.5	508.0	82.8
400	16	609.6	584.6	12.5	406.4	381.4	12.5	508.0	78.8
650 × 600	26 × 24	660.4	635.4	12.5	609.6	584.6	12.5	609.6	119.0
550	22	660.4	635.4	12.5	558.8	533.8	12.5	609.6	114.0
500	20	660.4	635.4	12.5	508.0	483.0	12.5	609.6	109.0
450	18	660.4	635.4	12.5	457.2	432.2	12.5	609.6	104.0
700 × 650	28 × 26	711.2	686.2	12.5	660.4	635.4	12.5	609.6	129.0
600	24	711.2	686.2	12.5	609.6	584.6	12.5	609.6	124.0
550	22	711.2	686.2	12.5	558.8	533.8	12.5	609.6	119.0
500	20	711.2	686.2	12.5	508.0	483.0	12.5	609.6	114.0
750 × 700	30 × 28	762.0	737.0	12.5	711.2	686.2	12.5	609.6	138.0
650	26	762.0	737.0	12.5	660.4	635.4	12.5	609.6	133.0
600	24	762.0	737.0	12.5	609.6	584.6	12.5	609.6	129.0
550	22	762.0	737.0	12.5	558.8	533.8	12.5	609.6	124.0
800 × 750	32 × 30	812.8	787.8	12.5	762.0	737.0	12.5	609.6	148.0
700	28	812.8	787.8	12.5	711.2	686.2	12.5	609.6	143.0
650	26	812.8	787.8	12.5	660.4	635.4	12.5	609.6	138.0
600	24	812.8	787.8	12.5	609.6	584.6	12.5	609.6	133.0
850 × 800	34 × 32	863.6	838.6	12.5	812.8	787.8	12.5	609.6	158.0
750	30	863.6	838.6	12.5	762.0	737.0	12.5	609.6	153.0
700	28	863.6	838.6	12.5	711.2	686.2	12.5	609.6	148.0
650	26	863.6	838.6	12.5	660.4	635.4	12.5	609.6	143.0
900 × 850	36 × 34	914.4	889.4	12.5	863.6	838.6	12.5	609.6	167.0
800	32	914.4	889.4	12.5	812.8	787.8	12.5	609.6	162.0
750	30	914.4	889.4	12.5	762.0	737.0	12.5	609.6	158.0
700	28	914.4	889.4	12.5	711.2	686.2	12.5	609.6	153.0

径の呼び(大径側 × 小径側)		大径側			小径側			端面から 端面まで の距離	概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ		
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂	H	kg
950 × 900	38 × 36	965.2	940.2	12.5	914.4	889.4	12.5	609.6	177.0
850	34	965.2	940.2	12.5	863.6	838.6	12.5	609.6	172.0
800	32	965.2	940.2	12.5	812.8	787.8	12.5	609.6	167.0
750	30	965.2	940.2	12.5	762.0	737.0	12.5	609.6	162.0
1000 × 950	40 × 38	1016.0	991.0	12.5	965.2	940.2	12.5	609.6	187.0
900	36	1016.0	991.0	12.5	914.4	889.4	12.5	609.6	182.0
850	34	1016.0	991.0	12.5	863.6	838.6	12.5	609.6	177.0
800	32	1016.0	991.0	12.5	812.8	787.8	12.5	609.6	172.0
1050 × 1000	42 × 40	1066.8	1041.8	12.5	1016.0	991.0	12.5	609.6	196.0
950	38	1066.8	1041.8	12.5	965.2	940.2	12.5	609.6	192.0
900	36	1066.8	1041.8	12.5	914.4	889.4	12.5	609.6	187.0
850	34	1066.8	1041.8	12.5	863.6	838.6	12.5	609.6	182.0
1100 × 1050	44 × 42	1117.6	1092.6	12.5	1066.8	1041.8	12.5	609.6	206.0
1000	40	1117.6	1092.6	12.5	1016.0	991.0	12.5	609.6	201.0
950	38	1117.6	1092.6	12.5	965.2	940.2	12.5	609.6	196.0
900	36	1117.6	1092.6	12.5	914.4	889.4	12.5	609.6	192.0
1150 × 1100	46 × 44	1168.4	1143.4	12.5	1117.6	1092.6	12.5	711.2	252.0
1050	42	1168.4	1143.4	12.5	1066.8	1041.8	12.5	711.2	246.0
1000	40	1168.4	1143.4	12.5	1016.0	991.0	12.5	711.2	240.0
950	38	1168.4	1143.4	12.5	965.2	940.2	12.5	711.2	235.0
1200 × 1150	48 × 46	1219.2	1194.2	12.5	1168.4	1143.4	12.5	711.2	263.0
1100	44	1219.2	1194.2	12.5	1117.6	1092.6	12.5	711.2	257.0
1050	42	1219.2	1194.2	12.5	1066.8	1041.8	12.5	711.2	252.0
1000	40	1219.2	1194.2	12.5	1016.0	991.0	12.5	711.2	246.0